Roll Ca	all Number	Agenda Item Number
		32
Date	December 18, 2006	

WHEREAS, the City Plan and Zoning Commission has advised that at a public hearing held on December 7, 2006, its members voted 8-0 to recommend **APPROVAL** of a request from David Paladino (purchaser) to rezone property located at 2700 Oxford Street from "R1-60" One-Family Low Density Residential District to a Limited "M-1" Light Industrial District to allow for redevelopment of the property for mini-warehouse and storage use subject to the applicant accepting the following conditions on the entire site:

- 1. Prohibition of driveways accessing Oxford Street, and New York Avenue east of 1<sup>st</sup> Street.
- 2. Provision of landscaping and buffer in accordance with the City's Landscaping Standards for the "C-2" District.
- 3. Compliance with all Site Plan requirements of the Permit and Development Center.
- 4. Compliance with the building code and issuance of all necessary permits for construction.
- 5. Prohibition of the following uses:
  - a. Adult entertainment business;
  - b. Asphalt and concrete mixing and products manufacturing:
  - c. Coalyards, cokeyards or woodyards;
  - d. Off-premise advertising signs;
  - e. Package goods stores for the sale of alcoholic beverages;
  - f. Pawn shops, payroll and title loan institutions;
  - g. Taverns and nightclubs; and
  - h. Used car sales lots.
- 6. Compliance with the following design standards for any future externally accessed mini-warehouse building.
  - a. All building facades facing a public street and not screened by another building, excluding windows and doors, shall be constructed with exterior materials primarily consisting of neutral tone masonry.
  - b. The required materials used for facades facing a public street must wrap around the sides of the building a distance of at least four (4) feet back from the street side façade.
  - c. No storage unit doors shall face Oxford or New York Street.

Roll Ca	all Number	Agenda Item Number
*****************		
Date	December 18, 2006 -2-	

- 7. Compliance with the following design standards for all future buildings other than externally accessed mini-warehouse buildings:
  - a. At least 60% of the exterior facade on the ground level of the structure facing a public street, excluding windows and doors, shall be covered with stone, brick, architectural tilt-up concrete panels, tile or architectural block such as split-face block.
  - b. Not more than 40% of the exterior façade facing a public street shall be metal or synthetic stucco (such as EFIS or Dryvit).
  - c. The required materials used for the exterior facades facing a public street must wrap around the sides of the building in either a wainscoat application across the entire side or extend the entire height of the facade a distance of at least four (4) feet back from the facade facing a public street.
  - d. No metal (such as standing seam metal), synthetic stucco material (such as EFIS or Dryvit) or other materials susceptible to damage shall be used as an exterior material below four (4) feet above grade.
  - e. No overhead doors or truck loading areas shall face Oxford Street, or New York Avenue east of 1st Street unless screened in a manor determined appropriate by the Community Development Director.
- 8. All gating and fencing facing a public street shall consist of wrought iron or tubular steel construction and shall be black or a neutral tone in color, with masonry pillars to compliment the appearance of the storage units.
- 9. Limitation of one-story buildings on the east side and no special height limit on building fronting 2<sup>nd</sup> Avenue.
- 10. Site plan to return to the Plan and Zoning Commission for approval of any proposals to modify the architectural or landscaping standards.

The subject property is further described as:

Lots 7, 8, 9, 10, 11 and 12, Block "F", G. B. Hammers Plat of the town of Englewood, an Official Plat; and the East ½ of vacated North/South alley right-of-way lying West of and adjoining said Lots 7 through 12, now included in and forming a part of the City of Des Moines, Polk County, Iowa.

(Continued)

Roll Call I	Number	a				Agenda Item Number
Date	)ecembe				-3-	
N		EREF	ORE, I	BE IT R	RESOLVED, by the City Council	of the City of Des
c a	onsidere it 5:00 p.	d shal .m. on	l be h	eld in th ary 8, 2	Council at which the proposed ne Council Chambers, City Hall, 007, at which time the City Cou who favor the proposal.	Des Moines, Iowa
p	roposal i even (7)	n the a	accom and no	panying t more t	y authorized and directed to ca I form to be given by publication of than twenty (20) days before the and Section 414.4 of the Iowa Co	once, not less than date of hearing, all
N	MOVED b	у			to adopt.	
FORM	APPROV	ED:				
•	C. Brown of City At	torney			(Z	ZON2006-00175)
OUNCIL ACTION	N   YEAS	NAYS	PASS	ABSENT	CERTIFICA	re-
COWNIE						
COLEMAN					I, DIANE RAUH, City Clerk certify that at a meeting of	
HENSLEY KIERNAN					said City of Des Moines, hel among other proceedings the	d on the above date,

APPROVED

Mayor

MAHAFFEY

TOTAL

MOTION CARRIED

VLASSIS

\_\_\_\_\_ City Clerk

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my seal the day and year first above written.

December	18,	2006
----------	-----	------

late	AND THE PROPERTY OF THE PROPER	estination of the state of the	
4gend	a Item =	32	
Roll C	all#	Deck 10 11 11 11 11 11 11 11 11 11 11 11 11	TO THE PERSON NAMED IN

Honorable Mayor and City Council City of Des Moines, Iowa

# Members:

Communication from the City Plan and Zoning Commission advising that at their meeting held December 7, 2006, the following action was taken:

# **COMMISSION RECOMMENDATION:**

After public hearing, the members voted 8-0 as follows:

Commission Action:	Yes	Nays	Pass	Absent
David Cupp	Х			
Shirley Daniels				X
Dann Flaherty	X			
Bruce Heilman	Χ			
Jeffrey Johannsen				Χ
Greg Jones	Χ			
Frances Koontz				Χ
Kaye Lozier	Χ			
Brian Meyer				Χ
Brian Millard				Χ
Brook Rosenberg	Χ			
Mike Simonson				Χ
Kent Sovern				Χ
Tim Urban	Χ			
Marc Wallace	X			

**APPROVAL** of a request from David Paladino (purchaser) to rezone property located at 2700 Oxford Street from "R1-60" One-Family Low Density Residential District to a Limited "M-1" Light Industrial District to allow for redevelopment of the property for mini-warehouse and storage use subject to the applicant accepting the following conditions on the entire site:

(ZON2006-00175)

- 1. Prohibition of driveways accessing Oxford Street, and New York Avenue east of 1<sup>st</sup> Street.
- 2. Provision of landscaping and buffer in accordance with the City's Landscaping Standards for the "C-2" District.
- 3. Compliance with all Site Plan requirements of the Permit and Development Center.
- 4. Compliance with the building code and issuance of all necessary permits for construction.



CITY PLAN AND ZONING COMMISSION ARMORY BUILDING 602 ROBERT D. RAY DRIVE DES MOINES, IOWA 50309 –1881 (515) 283-4182

ALL-AMERICA CITY 1949, 1976, 1981 2003

- 5. Prohibition of the following uses:
  - a. Adult entertainment business;
  - b. Asphalt and concrete mixing and products manufacturing:
  - c. Coalyards, cokeyards or woodyards;
  - d. Off-premise advertising signs;
  - e. Package goods stores for the sale of alcoholic beverages;
  - f. Pawn shops, payroll and title loan institutions;
  - g. Taverns and nightclubs; and
  - h. Used car sales lots.
- 6. Compliance with the following design standards for any future externally accessed miniwarehouse building.
  - a. All building facades facing a public street and not screened by another building, excluding windows and doors, shall be constructed with exterior materials primarily consisting of neutral tone masonry.
  - b. The required materials used for facades facing a public street must wrap around the sides of the building a distance of at least four (4) feet back from the street side façade.
  - c. No storage unit doors shall face Oxford or New York Street.
- 7. Compliance with the following design standards for all future buildings other than externally accessed mini-warehouse buildings:
  - a. At least 60% of the exterior facade on the ground level of the structure facing a public street, excluding windows and doors, shall be covered with stone, brick, architectural tilt-up concrete panels, tile or architectural block such as split-face block.
  - b. Not more than 40% of the exterior façade facing a public street shall be metal or synthetic stucco (such as EFIS or Dryvit).
  - c. The required materials used for the exterior facades facing a public street must wrap around the sides of the building in either a wainscoat application across the entire side or extend the entire height of the facade a distance of at least four (4) feet back from the facade facing a public street.
  - d. No metal (such as standing seam metal), synthetic stucco material (such as EFIS or Dryvit) or other materials susceptible to damage shall be used as an exterior material below four (4) feet above grade.
  - e. No overhead doors or truck loading areas shall face Oxford Street, or New York Avenue east of 1st Street unless screened in a manor determined appropriate by the Community Development Director.
- 8. All gating and fencing facing a public street shall consist of wrought iron or tubular steel construction and shall be black or a neutral tone in color, with masonry pillars to compliment the appearance of the storage units.
- 9. Limitation of one-story buildings on the east side and no special height limit on building fronting 2<sup>nd</sup> Avenue.
- 10. Site plan to return to the Plan and Zoning Commission for approval of any proposals to modify the architectural or landscaping standards.

# Written Responses

2 In Favor

3 In Opposition

This item would not require a 6/7 vote at City Council.

STAFF RECOMMENDATION AND BASIS FOR APPROVAL

Part A) Staff recommends that the requested rezoning be found in conformance with the Des Moines' 2020 Community Character Plan.

Part B) Staff recommends approval of the requested rezoning subject to the applicant accepting the following conditions on the entire site.

- 1. Prohibition of driveways accessing Oxford Street, and New York Avenue east of 1<sup>st</sup> Street.
- 2. Provision of landscaping and buffer in accordance with the City's Landscaping Standards for the "C-2" District.
- 3. Compliance with all Site Plan requirements of the Permit and Development Center.
- 4. Compliance with the building code and issuance of all necessary permits for construction.
- 5. Prohibition of the following uses:
  - a. Adult entertainment business;
  - b. Asphalt and concrete mixing and products manufacturing:
  - c. Coalyards, cokeyards or woodyards;
  - d. Off-premise advertising signs;
  - e. Package goods stores for the sale of alcoholic beverages;
  - f. Pawn shops, payroll and title loan institutions;
  - g. Taverns and nightclubs; and
  - h. Used car sales lots.
- 6. Compliance with the following design standards for any future externally accessed miniwarehouse building.
  - a. All building facades facing a public street and not screened by another building, excluding windows and doors, shall be constructed with exterior materials primarily consisting of neutral tone masonry.
  - b. The required materials used for facades facing a public street must wrap around the sides of the building a distance of at least four (4) feet back from the street side façade.
  - c. No storage unit doors shall face Oxford or New York Street.
- 7. Compliance with the following design standards for all future buildings other than externally accessed mini-warehouse buildings:
  - a. At least 60% of the first story exterior facade facing a public street, excluding windows and doors, shall be covered with stone, brick, architectural tilt-up concrete panels, tile or architectural block such as split-face block.
  - b. Not more than 40% of the exterior façade facing a public street shall be metal or synthetic stucco (such as EFIS or Dryvit).
  - c. The required materials used for the exterior facades facing a pubic street must wrap around the sides of the building in either a wainscoat application across the entire side or extend the entire height of the facade a distance of at least four (4) feet back from the facade facing a public street.
  - d. No metal (such as standing seam metal), synthetic stucco material (such as EFIS or Dryvit) or other materials susceptibility to damage shall be used as an exterior material below four (4) feet above grade.
  - e. No overhead doors or truck loading areas shall face Oxford Street, or New York Avenue east of 1st Street unless screened in a manor determined appropriate by the Community Development Director.

8. All gating and fencing facing a public street shall consist of wrought iron or tubular steel construction and shall be black or a neutral tone in color, with masonry pillars to compliment the appearance of the storage units.

#### STAFF REPORT

# I. GENERAL INFORMATION

- 1. Purpose of Request: The subject property is a part of a larger site the applicant is proposing to redevelop. The proposed project includes the construction of a 3-story climate control storage building on a 120' x 316' parcel located on the southeast corner of 2<sup>nd</sup> Avenue and New York Avenue and the construction of 10 single-story storage buildings on a 316' x 471' site that includes the 3 parcels that are proposed for rezoning.
- 2. Size of Site: The subject property measures 45,000 square feet (1.03 acres). The entire redevelopment site is 196,236 square feet (4.5 acres) in size.
- 3. Existing Zoning (site): "R1-60" One-Family Low Density Residential District and Gambling Games Prohibition Overlay District. The remainder of the applicants site is zoned "M-1", Light Industrial District.
- 4. Existing Land Use (site): Vacant residential structure and vacant land.
- 5. Adjacent Land Use and Zoning:

North - "R1-60", Uses are single-family residential.

**South** – "M-1", Uses are light industrial.

East - "R1-60", Uses are single-family residential.

**West** – "M-1", Uses are light industrial.

- **6. General Neighborhood/Area Land Uses:** The subject property is located at the eastern edge of the Union Park Neighborhood along the 2<sup>nd</sup> Avenue corridor. The Union Park Neighborhood consists primarly of residential uses. The general area around the site consists of commercial and light industrial uses along the 2<sup>nd</sup> Avenue corridor. This generally transitions to residential uses to the east of the site.
- 7. Applicable Recognized Neighborhood(s): Union Park Neighborhood.
- 8. Relevant Zoning History: N/A.
- 9. 2020 Community Character Land Use Plan Designation: General Industrial.
- 10. Applicable Regulations: The Commission reviews all proposals to amend zoning regulations or zoning district boundaries within the City of Des Moines. Such amendments must be in conformance with the comprehensive plan for the City and designed to meet the criteria in §414.3 of the Iowa Code. The Commission may recommend that certain conditions be applied to the subject property if the property owner agrees in writing, prior to the City Council Hearing. The recommendation of the Commission will be forwarded to the City Council.
- II. ADDITIONAL APPLICABLE INFORMATION

- 1. Buffering: Development of this site will require compliance with the Residential District protection requirements of the Zoning Ordinance (Sec. 134-1093). This includes the provision of a 25'-wide buffer with an opaque screen along all property lines that adjoin residential zoning districts. The opaque screen can be accomplished though the use of a fence, berm, plant material or a combination of these elements.
- 2. Landscaping: The applicant will be required to meet the City's Landscaping Standards when the site is developed. The "C-2" District standards apply to the parcel with frontage on 2<sup>nd</sup> Avenue because it is within 200' of 2<sup>nd</sup> Avenue, which is a Designated Landscape Corridor. Staff believes that "C-2" level landscaping should be provided on the entire site to mitigate its impact on the adjoining residential uses.

The "C-2" standards include the following:

- a. Open space equal to 20% of the site with 1 overstory deciduous tree, 1 evergreen tree and 1 shrub for every 2,500 square feet of required open space.
- b. A parking lot/vehicular area perimeter landscaped strip with 1 overstory tree and 3 shrubs per 50' lineal feet.

These standards will be evaluated further when the applicant submits a site plan. The applicant may need to provide interior parking lot plantings in addition to the above-mentioned landscaping.

- **3. Traffic/Street System:** The site will be primarly accessed from 2<sup>nd</sup> Avenue, which is an arterial road than can accommodate traffic generated by the proposed development.
- **4. Access:** The submitted site sketch indicates the site would be accessed by drives off of 2<sup>nd</sup> Avenue, New York Avenue, 1<sup>st</sup> Avenue, and Oxford Street. Staff believes that driveways should be prohibited on to streets that adjoin residential uses. Staff recommends that the prohibition of driveways accessing Oxford Street, or New York Avenue east of 1<sup>st</sup> Street be a condition of approval.
- **5. Parking:** A note on the site sketch indicates the development will have a total of 83 parking spaces. The site sketch does not provide enough information to determine if the proposed parking meets all of the City's requirements. This will be evaluated further during the site plan review process.
- 6. **Urban Design:** The subject property is at a transition point between residential uses to the east, and light industrial and commercial uses to the west. Staff believes that it is important that this property be well landscaped and that quality building materials be used when the site is developed. Staff recommends the following design requirements.
  - 1. Compliance with the following design standards for any future mini-warehouse building.
    - a. All building facades facing a public street, not screened by another building, shall be constructed with exterior materials primarly consisting of neutral tone masonry.
    - b. The required materials used for facades facing a public streets must wrap around the sides of the building a distance of at least four (4) feet back from the street side façade.
    - c. No storage unit doors shall face Oxford or New York Street.
  - 2. Compliance with the following design standards for all future buildings other than miniwarehouse buildings:

- a. At least 60% of the exterior facade facing a public street, excluding windows and doors, shall be covered with stone, brick, architectural tilt-up concrete panels, tile or architectural block such as split-face block.
- b. Not more than 40% of the exterior façade facing a public street shall be metal or synthetic stucco (such as EFIS or Dryvit).
- c. The required materials used for the exterior facades facing a pubic street must wrap around the sides of the building in either a wainscoat application across the entire side or extend the entire height of the facade a distance of at least four (4) feet back from the facade facing a public street.
- d. No metal (such as standing seam metal), synthetic stucco material (such as EFIS or Dryvit) or other materials susceptibility to damage shall be used as an exterior material below four (4) feet above grade.
- e. No overhead doors or truck loading areas shall face Oxford Street or New York Avenue east of 1<sup>st</sup> Street unless screened in a manor determined appropriate by the Community Development Director.
- 3. All gating and fencing facing a public street shall consist of wrought iron or tubular steel construction and shall be black or a neutral tone in color, with masonry pillars that compliment the appearance of the buildings on the site.

#### SUMMARY OF DISCUSSION

<u>Bert Drost</u>: Presented staff report and recommendation. Noted the applicant had not submitted any site plans or elevations. Presented the conceptual site sketch the applicant had submitted.

Brook Rosenberg left the meeting at 7:50 p.m.

Dann Flaherty: Asked about building height.

Larry Hulse: Noted the district would allow up to 75'.

<u>David Paladino</u>, 101 N. 38<sup>th</sup> Avenue: Owner of Dino's Storage. Pointed out a consideration that the three lots on the east are the only ones being requested for rezoning. Also noted in the Comprehensive Plan the area was planned to be zoned Industrial but there were three homes in the area at that time. With regard to the staff recommendation, they did not submit any elevations because they wanted to build a building that would be allowed in the industrial zoning classification. Would like to build a building without as much brick. Has never been required by a City to do that and it adds 25% to the cost of the project. Did not think the subject property should be required to have brick. Pointed out there have been two pre-application meetings and staff encouraged them to build on the subject site. Noted the median household income of Des Moines, they would be bringing a product into the area and would like staff to encourage their development instead of the excessive requirements.

<u>Tim Urban</u>: Asked for clarification from staff regarding the 25' buffer screening being applied for residential districts and asked if the requirements would apply to both frontages.

Mike Ludwig: Noted the M-1 is to the west of the three parcels and the buffer requirement for the residential would be to the north and the east.

<u>Tim Urban</u>: Asked about the redundancy of the buffer screening and the brick on the same elevations.

Mike Ludwig: Noted the landscape buffer would not be solid.

<u>Tim Urban</u>: Suggested there may be architectural materials that would be more cost-effective and would be as attractive as brick.

<u>Mike Ludwig</u>: Noted the Commission could put conditions on it and would need to define what standards they wanted the developer to meet for landscaping and buffering.

<u>Tim Urban</u>: Asked if a motion could include a provision that the architectural requirements versus landscaping or other devices could be negotiated between staff and the developer.

<u>Larry Hulse</u>: Just need to make sure the wording is clear so that when it gets built, it is what the Commission wanted.

Tim Urban: Asked if the applicant explored other masonry products such as a block building.

<u>David Paladino</u>: Noted their project on SE 14<sup>th</sup> Street has nova brick, which is more of a brick siding. It was \$20 per square foot for the areas affected. Tilt-up doesn't work very well because of the waste as a result of the number of doors and they found split-faced block to be more expensive as well.

<u>Tim Urban</u>: Asked about negotiating with staff regarding trading off opaque screening for architectural material.

<u>David Paladino</u>: Noted if they had to go with an architectural material, they would use alumishield, which is an embossed, metal insulated panel, which they found to be the step between steel siding and brick; it looks like stucco.

# CHAIRPERSON OPENED THE PUBLIC HEARING

There was no one in the audience to speak in favor of this request.

The following individual spoke in opposition:

<u>John Morrisey</u>, 2713 Oxford Street: Asked the Commission to take the applicant up on his statement that he doesn't care what happens on the residential portion of the property and leave it residential. The practical use of the property has provided the residents with more buffer than might otherwise be the case. To allow the applicant to rezone the property will take the buffer away and result in an intrusive effect on the neighborhood. Kids use the property to play on. Need to address the issue and make it clear that the site will not be a high-rise site. Pleased to see the staff suggested no access from Oxford and New York. Need help to deter truck traffic from any further east than 1<sup>st</sup> Street; need a barrier.

Tim Urban: Asked what the typical materials used on the residences surrounding the property are.

<u>John Morrisey</u>: Noted there is a fair amount of stucco on the lower portion and a siding or panel on the upper portion and there is a lot of vinyl siding going up and clapboard with 4" exposure.

<u>Tim Urban</u>: Asked about single-story structures.

<u>John Morrisey</u>: Does not have an opinion on the corner of 2<sup>nd</sup> Avenue.

<u>Tim Urban</u>: Asked if there were a choice between fencing, landscaping substantial enough to minimize the view of the buildings, if he would prefer that versus having brick or block without the dense screening material.

<u>John Morrisey</u>: Noted his preference would be not to build on the eastern edge of the property. As a residential neighbor to the property, he would need to see a drawing; if they can hide the structures it would be preferable. If the buffer area is not fenced at the street, it would be a bonus if the kids could play there. Would appreciate that being accommodated. Also noted there are no sidewalks on the parcel and asked if they were required.

<u>Mike Ludwig</u>: Noted the sidewalks would be addressed through review of the site plan. Explained staff believed it would be better to use the back of the building as a screen with landscaping.

<u>Tim Urban</u>: Noted there could still be berming and dense landscape with evergreen material to screen the buildings.

<u>David Cupp</u>: Did not like using landscape material for buffering because of the need for maintenance.

<u>Greg Jones</u>: Asked if the Community Character Plan should be changed back to residential. Asked if, since the developer made the statement that the project could be done without the parcel what would be gained or lost.

<u>Larry Hulse</u>: Explained it was an option available to the Commission. If the applicant only developed the existing M-1 portion of the property there would be no architectural limitations.

<u>Craig Wetzel</u>, Remax Real Estate Concepts: Asked if the request is to rezone the parcel from residential to M-1, if it would be done or recommended to the Council anyway or just as part of the storage project.

Dann Flaherty: If it is rezoned any development would be subject to the conditions noted.

<u>Craig Wetzel</u>: Noted the existing buildings do have a demand, which has come forth and they would be used in their existing status. Also asked if there had been any consideration on the demolition for environmental concerns.

<u>Dann Flaherty</u>; Noted he would have to respond to that with the agencies responsible for those issues.

<u>David Paladino</u>: Noted he has already done a Phase I and there were no environmental issues. The storage facility has a low use and they do not design the facilities for trucks, tractor-trailers or semis, but for 32' U-Hauls and a firetruck. They would only have access on 1<sup>st</sup> Street to the back parcel. There would only do the height as one-story in the back and they would agree to that in writing. The per capita income was only brought up to show that they embrace that and they feel their use can service that market where other uses might require a higher per capita income. If the three lots aren't changed to industrial, asked what their highest and best use would be.

#### CHAIRPERSON CLOSED THE PUBLIC HEARING

David Cupp: Moved staff recommendation.

<u>Tim Urban</u>: Offered a friendly amendment that if the petitioner chooses to propose a modification of the architectural standards in a trade off for buffer screening, that the site plan would have to return to the Plan and Zoning Commission for approval.

David Cupp: Accepted the friendly amendment. .

<u>Bruce Heilman</u>: Suggested the development on SE 14<sup>th</sup> Street was a tough piece of land to develop but with the brick the Commission was very pleased and if the brick is a deal-breaker for

the subject site, then the three parcels should not be rezoned. The SE 14<sup>th</sup> Street development is of high quality. Expressed support for sticking to the staff recommendation.

Tim Urban: Also suggested that all buildings on the entire site be limited to one story.

<u>Larry Hulse</u>: Clarified the height limitation would only be for the buildings east of 1<sup>st</sup> Street and would not include the one along 2<sup>nd</sup> Avenue.

<u>Tim Urban</u>: Noted he was only talking about the site between 1<sup>st</sup> & York, Oxford and Sheridan.

<u>Roger Brown</u>: Noted City Council cannot impose any condition that has not been agreed to in writing in advance by the applicant and explained he would present the changes to the applicant for his agreement or not and if he chooses not to agree to them then the decision for Council will be to deny it or to approve it without the conditions.

<u>Tim Urban</u>: Noted the purpose for his amendment was to provide an alternative to the applicant that if he wants to deviate from the architectural requirements, he would have to negotiate with the staff over additional screening elements, in which case a site plan would have to return to the Commission.

<u>David Cupp</u>: Accepted friendly amendments.

<u>Dann Flaherty</u>: Reiterated the motion to be staff recommendation with buildings east of 1<sup>st</sup> Street limited to one-story and no limit on the 2<sup>nd</sup> Avenue buildings, and if something different is to be done with landscaping and architecture it would need to be worked out and brought to the Commission for approval.

Motion passed 8-0.

Respectfully submitted,

Michael Ludwig, AICP Planning Administrator


MGL:dfa

Attachment

						roperty located a	at 2700 Oxford	1	File#
Street. The su	bject prop	erty is	owned l	by Hirsch In	dus	stries, Inc.			ZON2006-00175
Description of Action	Limited	"M-1"		lustrial Distr		)" One-Family Lo to allow for rede			
2020 Commun Character Pla			Genera	l Industrial.					
Horizon 2025 Transportation	n Plan		No Plar	ned Improv	em	nents.			
Current Zonin	g Distric	:	"R1-60"	One-Famil	y L	ow-Density Resi	dential Distric	t.	
Proposed Zon	ing Distr	ict	Limited	"M-1" Light	Inc	dustrial District.			
Consent Card Inside Outside	Area	ses		avor 2		Not In Favor	Undetermir 0	ned	% Opposition
Plan and Zoni	ng	Appr	oval	8-0		Required 6/7	Vote of	Yes	
Commission A	AGUON	Denia	al 			the City Coun	GH (As begins to the	No	X

# David Paladino - 2700, 2710, 2716 Oxford Street

ZON2006-00175

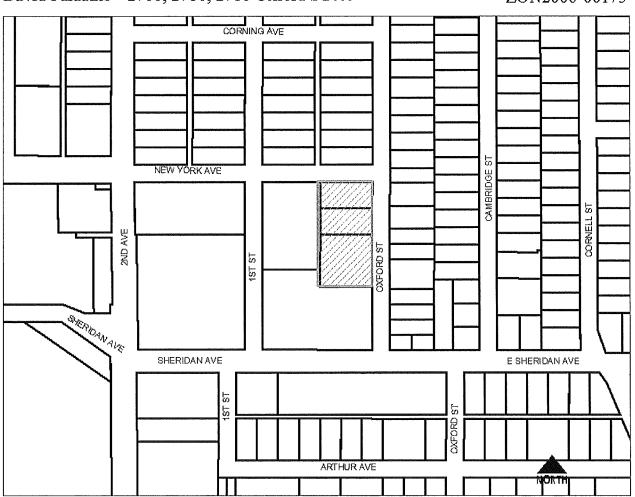

Item 2006 00175 - Date 19-28-06	
(am) (am not) in favor of the request.	4
(Circle One)  RECEIVED  Print Name Laura Liggins	
DEC 0 1 2006  Signature Jane Signature  COMMUNITY DEVELOPMENT  DEPARTMENT  Address 2804/ Stude	
Reason for opposing or approving this request may be listed below:  Think if well see alot letter  than what was in there.	
	<del></del>
	-
Item 2006 00175 Date 1000 28 20	<u>K</u>
I(am) (am not) in favor of the request.	
(Circle One)  RECEIVED Print Name Relly Lens ley	
COMMUNITY DEVELOPMENT  Address  Address	
DELYLLIME	
Reason for opposing or approving this request may be listed below:	
Inscovement in the neighborhood	
Ito would be much better than	
and the laston.	
avo no que o	

Item	2006 00175	Date_NOV 2814 06
l(am)	(am not) in favor of the request.	
(Circle	e One)	
	RECEIVED	Name LOCAN ENOS
	DEC 0 1 2006 Signa	iture Loga Em
CO	MMUNITY DEVELOPMENT DEPARTMENT  Addr	ress 28/7 OXI=OKN 37
Reason f	for opposing or approving this request r	may be listed below:
	Why change the z	Zuncing and dectrox neighborhoods
لرر	hen FAST GATS hac	Lots of land for juil such a
bus	sincss?	
***		
		· · · · · · · · · · · · · · · · · ·
	2006 00175 (am not) in favor of the request.	Date 11 -29-06
(Circle	le One)	01 00 0.
• •	RECEIVED Print	Name Chas VI AWSOW
*\$	DEC 0 1 2016 Signs	ature 2612 CAmbridge St
	COMMUNITY DEVELOPMENTAddr	105 Moines, 50313-482
	DEPARTMENT	
Reason 1	for opposing or any this request to	to the
	e) allowed a	1 colt of
7.60	cking bldg over	Shendan Hue o a so called
Pr	uce tences	s Now a junk your torola
ter	tingalion lases c	and tence delarated. We
Nee	ed phore open	space to Keep The homes
OXY	fond from the	ommerical section ou 125
Sher	vidan of Need York	K- (***)
	`\	
	, , , , , , , , , , , , , , , , , , ,	

2006 0017	•
I (am) (am not) in favor of the reque	St.
(Circle One)	
RECEIVED,	Print Name CHRISTINA SIMPSON
DEC 0 1 200	Signature Christian Llimpson
COMMUNITY DEVELOPMENT DEPARTMENT	Address 2804 Oxtord 20. WILLIAM
Reason for opposing or approving this	request may be listed below:
TAGRE WILL be a	nuch more traffic in the
ARRA and the	s flood lights will be a
MISENSE LOW DED	old in the over
() P	
	THANK YOU
	CS.

